

# SIMPLIPHI YOUR POWER WITH THE **BIG GENNY** EMERGENCY POWER KIT



PORTABLE EMERGENCY POWER SUPPLY AT HOME, WORK OR ON-THE-GO

The Big Genny™ Emergency Power Kit is a portable, rechargeable battery-powered generator of AC power. It stores electricity from any power source — grid, solar, wind — when access to AC power is not available, such as power outages and emergencies. It is a silent, non-toxic, cobalt-free, power supply that can be used anytime, anywhere to charge cell phones, tablets, laptops, fans, small appliances, and many other types of portable equipment for years of reliable use.

## Big Genny™ EK

### Big Genny™

Voltage Output	115-120 VAC/60 Hz 5 Volt USB
Capacity	1,140 Wh/89 Ah
Peak Output	1,200 Watts AC
Connectors	(2) AC Outlets (2) USB connectors
Memory Effect	None, recharge anytime
Operating Temp	32° to 104°F (0° to 40°C)
Charge Retention	<1% loss per month
Charge Cycles	2,500
Standard Charge Time	11 hours
Charge Input	12.8 VDC
Solar Input	12 to 18 VDC up to 15A
Warranty	5 years on battery system

- AC power for lights, chargers, computers, blenders, aquarium pumps, water purifiers, power tools and more
- 5 Volt USB port for cell phones and tablets
- Fits under a desk, in the car, bus or train
- Heavy-duty wheels and collapsible handle, sealed weather-resistant case
- Can be recharged thousands of times
- Safe, maintenance-free and eco-friendly



**DIMENSIONS:** 21 x 11 x 8 inches

**WEIGHT:** 45 lbs (20.4 kg)


- Meets transport safety weight requirements: Less than 35 kg including packaging
- UN 3480, Lithium Ion batteries, 9, II
- UL and CE listed, UN/DOT and RoHS compliant components
- Designed and built in California, USA
- Power tool, power strip & lights not included

**Power Unplugged. Anytime. Anywhere.™**



420 Bryant Circle | Ojai, CA 93023, USA | +1 (805) 640-6700 | [SimpliPhiPower.com](http://SimpliPhiPower.com)

# SIMPLI PHI YOUR POWER WITH THE **BIG GENNY** EMERGENCY POWER KIT

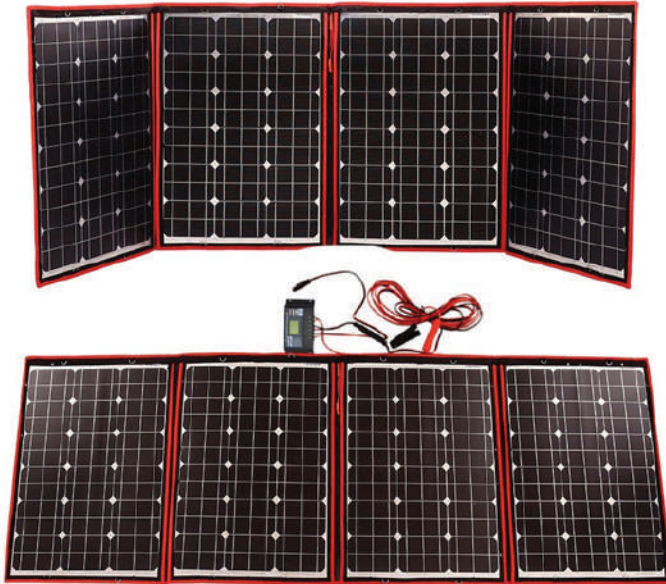

## 200W Portable Solar Panel

Voltage Output	12 VDC
Peak Output	200 Watts AC
Output Current (Imp)	11.20 Amps
Short Circuit Current (Isc)	11.36 Amps
Open Circuit Voltage	22.5 VDC
Folded Dimensions	21.2 x 28.7 x 0.9 inches
Opened Dimensions	85 x 28.7 x 0.2 inches
Net weight	11.5 lbs / 5.2 kgs
Solar Output	18 VDC / 11.2 ADC
Connectors	3-pin XLR

- Monocrystalline Solar Cell
- High efficiency conversion rate to maximize the use of available sunlight
- CE Approved

**Power Unplugged. Anytime. Anywhere.™**